



Keep the
KITCHEN
Out of the
LIVINGROOM!

- Economical
- Instant
- Positive

—Elimination of all
greasy vapors and
cooking odors from
the

KITCHEN RANGE



WITH THE
VENTAHOOD
KITCHEN VENTILATOR

This centrifugal exhaust unit (a patented feature) revolving at high speed, draws steam, grease-laden vapors, cooking odors and excess heat off the range and forces them out of the house. The air over the range is constantly being changed—odors, vapors or heat have no chance to float out into the kitchen, and wander through the house.



Here's why **Vent-A-Hood**



The Popular Model "A"

At last you can now know what a joy it is to have a clean, cool kitchen! Walls and ceiling free from grease—your home free of cooking odors, this model Vent-A-Hood is designed for use where the range stands alone as a separate unit in the kitchen. Its glistening chrome trim and white baked enamel finish will add to the beauty of your range and to the attractiveness of your entire kitchen.

This model is offered in three popular sizes, each Hood equipped with the Vent-A-Hood No. DX-1 powerful, positive-action, domestic size centrifugal exhausting unit. (DX-2 or DX-H units also available at slightly higher prices.)

Cat. No.	Size	Dimensions	Shipping Weight
A-40	Apartment	28" x 40"	77 lbs.
A-44	Standard	28" x 44"	81 lbs.
A-48	Jumbo	28" x 48"	84 lbs.

A MODEL AND SIZE FOR EVERY KITCHEN

A Hood is Different



Smartly Styled Model "B"

Vent-A-Hood fits beautifully into your kitchen plan. This model is styled to harmonize with custom-built or factory-made cabinets. It is furred-in over head and just becomes a part of your cabinet on either or both sides. Soffets or fillers for space between top of hood and furring can be furnished at small additional cost. Stock soffets are 6" high for 30" cabinets, and 12" high for 36" Cabinets. Equally attractive installed without adjacent wall cabinets.

The model "B" is offered in four stock sizes, each equipped with the Vent-A-Hood DX-1 domestic size centrifugal exhausting unit (DX-2 or DX-H units also available at slightly higher prices.)

Cat. No.	Size	Dimensions	Shipping Weight
B-40	Apartment	28" x 40"	79 lbs.
B-42	Cabinet	28" x 42"	81 lbs.
B-44	Standard	28" x 44"	83 lbs.
B-48	Jumbo	28" x 48"	86 lbs.

VERY KITCHEN PLAN — A d

rent and Better!



Ultra-Modern De Luxe Model

Here, Vent-A-Hood is the last word in smartness for the ultra modern kitchen. Heavy glass side wings, chromium trimming, ultra white baked enamel, streamlined design—it stands out as the most beautiful fixture in the kitchen. The lumiline light inside the hood and the motor are operated from switch in decorative front plate. Soffets same as with Model "B" to match cabinets. It is equally attractive when installed without cabinets.

The DeLuxe Model is offered in four stock sizes, each equipped with No. DX-1 domestic centrifugal exhausting unit. (DX-2 or DX-H units also available at slightly higher prices.)

Cat. No.	Size	Dimensions	Shipping Weight
D-40	Apartment	28" x 40"	102 lbs.
D-42	Cabinet	28" x 42"	104 lbs.
D-44	Standard	28" x 44"	107 lbs.
D-48	Jumbo	28" x 48"	111 lbs.

Is Beauty and Style!



OLD HOODS MADE MODERN WITH VENT-A-HOOD EXHAUST UNIT


If you have a built-in hood or alcove in your kitchen, make it modern and efficient by equipping it with the Vent-A-Hood exhaust unit—the same as used in all regular Vent-A-Hoods, with removable grease trap and powerful centrifugal blower unit that draws out the greasy vapors, excess heat and cooking odors.

Where the built-in hood is too high (over 72" from floor) and not large enough to completely cover and overlap the edges of the entire range, we recommend the installation of a complete VENT-A-HOOD kitchen ventilator directly under the built-in hood.

These drawings indicate only a few of the venting methods possible with standard 5-inch stove pipe and fittings. Other methods are shown in the installation instructions furnished with each hood.

Wooden wall mounting frame is screwed or nailed to wall studs (indicated in dotted lines)—it is almost always possible to strike three studs.

- a—Directly into flue.
- b—Through ceiling then into flue.
- c—Continued through roof with standard rainproof.
- d—Open into attic space.
- e—To louvered outlet in outside wall.
- f—Into flat duct between ceiling joists then to wall outlet or flue.
- g—Into flat duct between wall studs then to outlet in roof or to flue or attic.

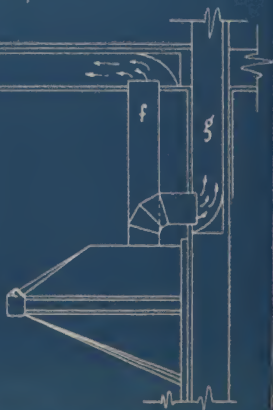

DOMESTIC EXHAUSTING UNIT

An amazing development, the patented Centrifugal Exhausting Unit with built-in Grease Trap, is an important part of every VENT-A-HOOD Kitchen Ventilator. (See cut-away view). All mechanism is completely concealed.

Equipped with standard make motor, enclosed-type, protected from dust, heat, and grease. Concealed indirect utility light. Individual control. Both consume about 75 watts and operate on 110 volt, 60 cycle, A.C. For A.C. in other cycles and D.C. in any voltage, prices slightly higher. Balanced aluminum centrifugal (blower) wheel fan.

Exhausting Units for built-in hoods are the same as used in the VENT-A-HOOD, with mounting flanges added and utility light on bottom of housing. Packed one complete unit in carton with installation directions.

Specifications	No.	R.P.M	C.F.M	Weight	Ship. Wt.
Single Speed	DX-1	1500	325	20 lbs.	36 lbs.
		{ 1200	240 }		
Two Speed	DX-2	{ 1500	325 }	20 lbs.	36 lbs.
Hi-Speed (Single speed only	DX-H	1725	365	23 lbs.	39 lbs.

GENERAL INFORMATION

Specially prepared copper-bearing, rust-proof, 24 gauge steel is used in all VENT-A-HOOD products. Permanent-white baked enamel finish. (Colors slightly higher).

Panels protect walls from splashing grease. Side wings confine fumes and prevent draft interference. No venting material is furnished with VENT-A-HOOD products, except at additional cost when specified.

Select VENT-A-HOOD model and size to completely cover range and overlap front and both sides. The VENT-A-HOOD can be built to any size or specification. Packed complete, knocked-down, in one carton with easy-to-follow installation directions.

The VENT-A-HOOD bears the Standard Electrical Manufacturers one year guarantee against defective materials and workmanship.

MANUFACTURED BY

The VENT-A-HOOD Co.

DALLAS, TEXAS

(All features of the VENT-A-HOOD are fully covered by Patents or Patents Pending.)

FOR SALE BY

An amazing device
ing Unit with built
every VENT-A-HOOD
view). All mechanical

Equipped with a
ected from dust, heat
light. Individual components
operate on 110 volts
and D.C. in any
aluminum centrifugal

Exhausting Unit
the VENT-A-HOOD
light on bottom of
carton with install

Specifications
Single Speed _____

Two Speed _____
Hi-Speed (Single
speed only _____

GENERAL

Specially prepared
steel is used in a
white baked enamel

Panels protect
confine fumes and
material is furnished
at additional cost

Select VENT-A-HOOD
range and overlap
can be built to any
knocked-down, in
directions.

The VENT-A-HOOD
facturers one year
workmanship.

The

(All features of
Pa

Tulane University: Southeastern Architectural Archive <http://seaa.tulane.edu>

From the collection of

<https://archive.org/details/buildingtechnologyheritagelibrary>

BUILDING TECHNOLOGY HERITAGE LIBRARY

Digitized by ASSOCIATION FOR PRESERVATION TECHNOLOGY, www.apti.org for the

centrifugal Exhaust-
important part of
r. (See cut-away
aled.

enclosed-type, pro-
led indirect utility
about 75 watts and
C. in other cycles
higher. Balanced

he same as used in
added and utility
complete unit in

Weight	Ship. Wt.
20 lbs.	36 lbs.
20 lbs.	36 lbs.
23 lbs.	39 lbs.

ION

t-proof, 24 gauge
ducts. Permanent-
ly higher).

crease. Side wings
ence. No venting
D products, except

o completely cover
the VENT-A-HOOD
Packed complete,
follow installation

l Electrical Manu-
tive materials and

Co.

fully covered by
g.)